



Project \_\_\_\_\_ Item# \_\_\_\_\_

# UTILITY REFRIGERATOR

## LOW HEIGHT REFRIGERATOR-REMOTE-ONE SECTION



MODEL LHR-30-2D  
SHOWN WITH OPTIONAL MARINE EDGE TOP  
AND RIGHT SIDE STUB OUTS

MODEL NO.	DESCRIPTION
<input type="checkbox"/> LHR-30-2D	30" Wide, Two Drawers, 3 Pans Front-to-Back
<input type="checkbox"/> LHR-30T-2D	30" Wide, Two Drawers, 3 Pans Front-to-Back
<input type="checkbox"/> LHR-36-2D	36" Wide, Two Drawers, 4 Pans Side-by-Side
<input type="checkbox"/> LHR-36T-2D	36" Wide, Two Drawers, 4 Pans Side-by-Side
<input type="checkbox"/> LHR-48-2D	48" Wide, Two Drawers, 6 Pans Side-by-Side
<input type="checkbox"/> LHR-48T-2D	48" Wide, Two Drawers, 6 Pans Side-by-Side

See nomenclature for model numbers with drawer combinations

Model numbers with "T" accommodate 6" deep pans for extra capacity

### STANDARD FEATURES

- Modular design allows for side-by-side line up of cabinets
- Stainless steel front, sides and self-closing drawers
- Rugged drawer construction
- Integral one-piece stainless steel drawer pull
- Snap-in magnetic gaskets
- Coved corner stainless steel interior
- Drawers hold two 12" x 20" pans or fractional size pans (pans by others)
- Adjustable 6" heavy-duty legs or 6" casters in lieu of legs
- Utilities pre-plumbed with stub outs on left side (optional on right side)
- Heavy-duty built-in security cylinder door lock
- Concealed condensate heaters around section openings
- Self-closing door hinges with stay-open feature at 120 degrees (std. door hinging is left door hinged left, center and right doors hinged right; other configurations available)
- Expansion valve refrigeration system
- **Reinforced top to support heavy restaurant equipment**
- **Specially insulated top for efficient cooling when used with cooking equipment**
- Low cabinet height places cooking equipment at ergonomically convenient level
- Condensate evaporator
- R-404a refrigerant for superior temperature recovery and pulldown
- Impact-resistant PVC breaker strip
- **3 year parts, 1 year labor warranty**

### OPTIONS & ACCESSORIES

- ☐ Stainless steel top (specify equipment flat, or marine edge type)
- ☐ Stainless steel back \_\_\_\_ and/or bottom \_\_\_\_ (specify either or both)
- ☐ Marine secure latch
- ☐ Door in lieu of drawers (specify hinging)
- ☐ Drawer locking hasp
- ☐ Additional chrome wire shelves (specify quantity) \_\_\_\_\_
- ☐ Stainless steel wire shelves in lieu of chrome
- ☐ Thermostat & solenoid
- ☐ Condensing unit (air or water-cooled; please specify)
- ☐ Alternate locations for refig/elec/drain stub outs (please specify)
- ☐ 6" front locking casters in lieu of legs (no charge)
- ☐ 6" seismic legs
- ☐ Correctional facilities package
- ☐ Custom modifications (please specify)



#### UTILITY REFRIGERATOR

Manufacturers of The Finest Quality Refrigeration Equipment  
Since 1931

[www.utilityrefrigerator.com](http://www.utilityrefrigerator.com)

PROUDLY MADE IN THE USA






Project \_\_\_\_\_ Item# \_\_\_\_\_

# UTILITY REFRIGERATOR

## LOW HEIGHT REFRIGERATOR-REMOTE-ONE SECTION

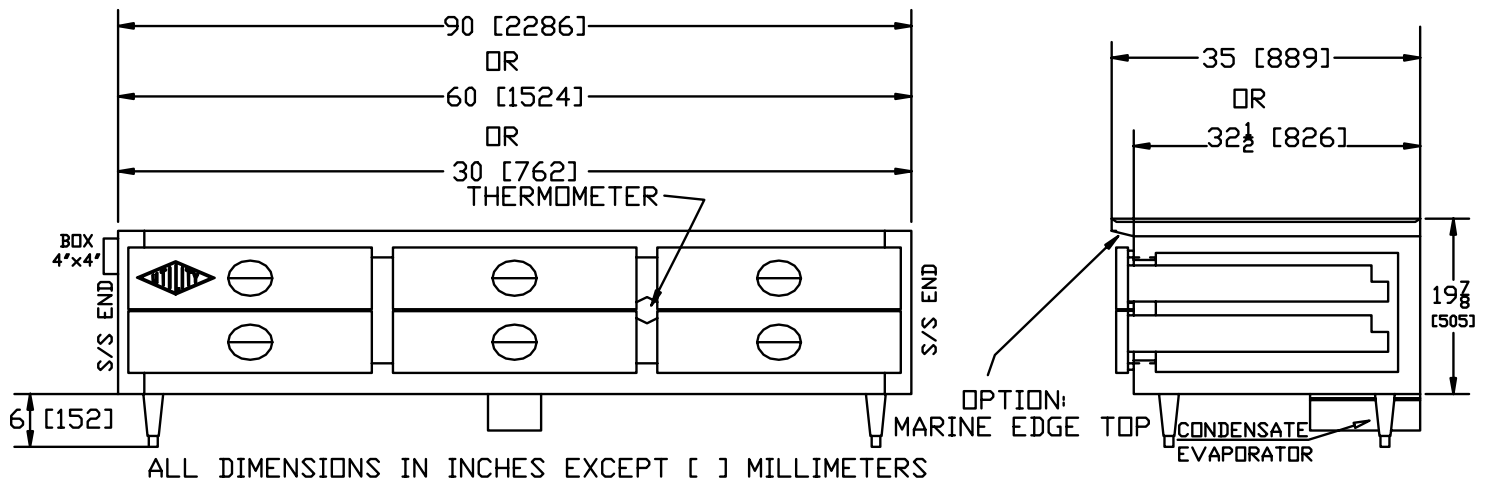

PRODUCT DATA (DATA IS FOR STD. MODELS: OPTIONS MAY CHANGE SPECIFICATIONS)	LHR-30-2D	LHR-30T-2D	LHR-36-2D	LHR-36T-2D	LHR-48-2D	LHR-48T-2D
Width (overall)	30"	30"	36"	36"	48"	48"
Depth (overall)	34 1/2"	34 1/2"	34 1/2"	34 1/2"	34 1/2"	34 1/2"
Height (optional stainless top adds 1")	25"	27"	25"	27"	25"	27"
Depth (overall, drawer fully extended)	55 1/2"	55 1/2"	55 1/2"	55 1/2"	55 1/2"	55 1/2"
Pan capacity, 12" x 20" pans	3	3	4	4	6	6
Voltage (dedicated circuit required)	115	115	115	115	115	115
Amperage	2.5	2.6	2.5	2.6	3.4	3.5
NEMA plug configuration	5-15 P	5-15 P	5-15 P	5-15 P	5-15 P	5-15 P
BTU Req. (90°F ambient, 20°F evaporator, 20' max. line length)	650	685	875	901	1150	1199
Ship weight (lbs.)	297	307	345	355	437	447
Ship volume (cu. ft.)	21	31	25	27	32	35
Crated dimensions (38 1/2" D)	27" H x 35 1/2" W	29" H x 35 1/2" W	27" H x 41 1/2" W	29" H x 41 1/2" W	27" H x 53 1/2" W	29" H x 53 1/2" W

### SPECIFICATIONS

**Cabinet Exterior** - Exterior sides and front are constructed of heavy gauge stainless steel or aluminum. Exterior back and bottom are constructed of heavy gauge galvanized or optional stainless steel. Exterior dial thermometer. Square-cornered construction allows for continuous side-by-side line-up of sections. Cabinet is supported on stainless steel adjustable 6" legs. Cabinet body is 100% CFC free, foamed-in-place polyurethane insulation.

**Cabinet Interior** - All heavy gauge stainless steel construction with coved corners. Optional automatic interior light with concealed actuator. Heavy-duty stainless steel shelf standards and shelf clips for superior durability and corrosion resistance. One (1) chrome plated wire shelf per door opening. Each drawer has four, 2" diameter ball-bearing rollers which travel on 14 gauge stainless steel slides. Door openings protected by impact-resistant PVC breaker strip.

**Doors** - All stainless steel construction with magnetic snap-in gasket. Door openings have built-in energy saving condensate heaters. One piece, stamped door handle with built-in security cylinder lock. In order to prevent damage to door during installation, doors are equipped with self-closing lift-off cam hinges for easy door removal. Doors stay open at 120 degrees for easy access to interior. Insulation is 100% CFC free, foamed-in-place polyurethane. Standard door hinging is left door hinged left, center and right doors hinged right (other configurations available-please specify).

**Refrigeration** - R-404a refrigerant. Thermostatic expansion valve for superior performance and efficiency, faster temperature recovery, less running time and lower energy consumption. Evaporator coil fully installed with pre-plumbed, stubbed out refrigeration and electrical lines to save time and expense during installation. Drain line exits on bottom at center of rear wall (other configurations available-please consult factory).

In line with its policy to continually improve its products, Utility Refrigerator reserves the right to change materials and specifications without notice.



UTILITY® IS PROUDLY MADE IN THE USA

LHRREM1-GL



### UTILITY REFRIGERATOR

Manufacturers of The Finest Quality Refrigeration Equipment Since 1931  
10029 Bradley Ave. Pacoima, CA 91331  
(818) 899-8300 Fax (818) 899-8335  
www.utilityrefrigerator.com