



UTILITY REFRIGERATOR

ROLL - IN / ROLL-THRU FREEZERS-SELF-CONTAINED



MODEL RIF-75-SS-2S

MODEL NO.	DESCRIPTION
<input type="checkbox"/> RIF-30-SS-1S	30" Wide, One Door
<input type="checkbox"/> RIF-375-SS-1S	37.5" Wide, One Extra Wide Door
<input type="checkbox"/> RIF-60-SS-2S	60" Wide, Two Doors
<input type="checkbox"/> RIF-75-SS-2S	75" Wide, Two Extra Wide Doors
<input type="checkbox"/> RIF-90-SS-3S	90" Wide, Three Doors

OPTIONS	MODEL NO. MODIFICATION
<input type="checkbox"/> Roll-Thru	Change "RI" to "RT"

STANDARD FEATURES

- Stainless steel front and sides
- Stainless steel interior
- Heavy-gauge, reinforced stainless steel floor
- Standard width models for end-loading racks
- Extra-wide models for side-loading racks and dollies
- Self-closing door hinges with stay-open feature at 120 degrees (standard door hinging: Single door units hinged on left; Two door units, left door hinged on left, right door hinged on right; Three door units, left door hinged on left, center and right doors hinged on right. Other configurations available)
- Full-length recessed Unigrip™ door handle with security heavy-duty built-in cylinder lock
- Automatic interior light (switch concealed in door hinge)
- Stainless steel entrance ramps (removable)
- Stainless steel cart guides and bumpers
- Condensate heaters around door openings
- Three hinges per door
- Snap-in magnetic door gaskets
- Expansion valve refrigeration system
- Top-mounted compressor
- Digital temperature control
- R-404a refrigerant for superior temperature recovery and pulldown
- Condensate evaporator
- Impact-resistant PVC breaker strip
- Automatic defrost
- 5 year compressor, 3 year parts, 1 year labor warranty

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel bottom
- Shelving options (in lieu of cart or above cart; please specify)
- Reach-in half doors on rear side of roll-thru models
- Water-cooled condensing unit
- Temperature alarm
- Correctional facilities package
- Double-deep configuration
- Custom modifications (please specify)



UTILITY REFRIGERATOR

Manufacturers of The Finest Quality Refrigeration Equipment
Since 1931

www.utilityrefrigerator.com


PROUDLY MADE IN THE USA





UTILITY REFRIGERATOR

ROLL - IN / ROLL-THRU FREEZERS-SELF-CONTAINED

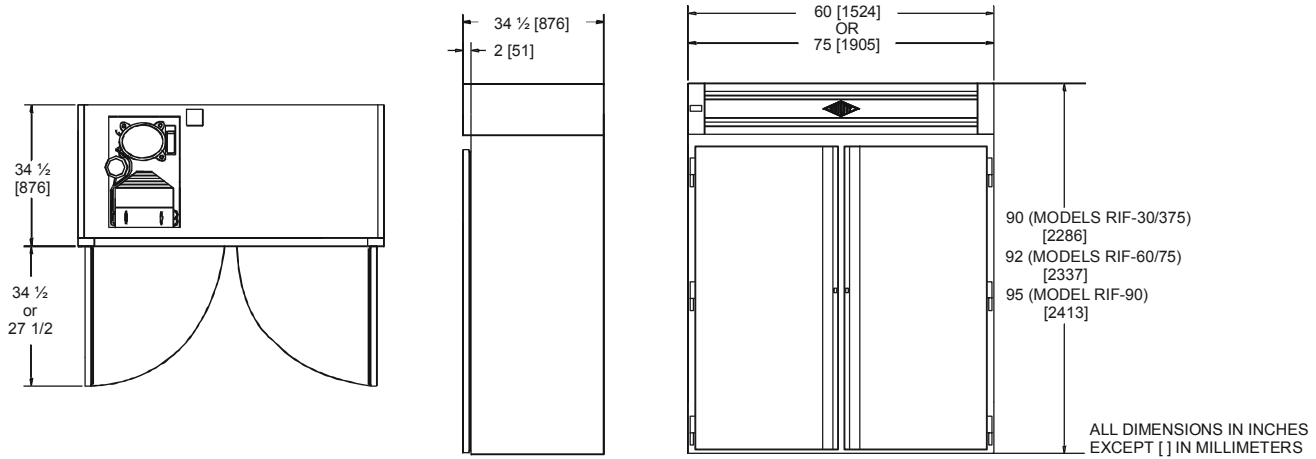

PRODUCT DATA (DATA IS FOR STD. MODELS: OPTIONS MAY CHANGE SPECIFICATIONS)	RIF-30	RIF-375 Extra Wide Door	RIF-60	RIF-75 2 Extra Wide Doors	RIF-90
Width (overall)	30"	37.5"	60"	75"	90"
Depth (overall)	34 1/2"	34 1/2"	34 1/2"	34 1/2"	34 1/2"
Height	90"	90"	92"	92"	95"
Depth (door open 90 deg.)	62"	69"	62"	69"	62"
Door opening (net width)	23 1/4"	30 3/4"	23 1/4"	30 3/4"	23 1/4"
Cart width, maximum	23"	30 1/2"	23"	30 1/2"	23"
Cart height, maximum	66"	66"	66"	66"	65"
Cart depth, maximum	29"	29"	29"	29"	29"
Voltage (dedicated circuit required)	115	115	115	115-208/230	115-208/230
Amperage	11.4	13.3	24.2	16.9	23.1
NEMA plug configuration	5-15 P	5-15 P	No Cord	No Cord	No Cord
Ship weight (lbs.)	605	740	1010	1184	1220
Ship volume (cu. ft.)	90	110	165	205	240
Crated dimensions (87" H)	33 1/2"W x 38 1/2"D	41"W x 38 1/2"D	63 1/2"W x 38 1/2"D	78 1/2"W x 38 1/2"D	93 1/2"W x 38 1/2"D

SPECIFICATIONS

Cabinet Exterior - Exterior sides are constructed of heavy gauge stainless steel or aluminum. Exterior back and bottom are constructed of heavy gauge galvanized or optional stainless steel. Top-mount housing and louver rails are stainless steel. Exterior digital thermometer. Cabinet body is 100% CFC free, foamed-in-place polyurethane insulation.

Cabinet Interior - All heavy gauge stainless steel construction with radius corners. Stainless steel cart guides and entrance ramps. Automatic interior light with concealed actuator. Door openings protected by impact-resistant PVC breaker strip.

Doors - All stainless steel construction with magnetic snap-in gasket. Door perimeters have built-in energy saving condensate heaters. In order to prevent damage to door during installation, doors are equipped with self-closing lift-off cam hinges for easy door removal. Doors stay open at 120 degrees for easy access to interior. Standard hinging is left door hinged left, center and right doors hinged right (other configurations available; please specify.)

Refrigeration - Top-mounted fully hermetic compressor with R-404a refrigerant. Thermostatic expansion valve for superior performance and efficiency, faster temperature recovery, shorter running time, and lower energy consumption. Pressure control prevents compressor burnout in case of loss of refrigerant. Easy-to-use digital temp. control enables users to adjust setpoint between -5 to +5 degrees F.

In line with its policy to continually improve its products, Utility Refrigerator reserves the right to change materials and specifications without notice.



UTILITY REFRIGERATOR

Manufacturers of The Finest Quality Refrigeration Equipment Since 1931
10029 Bradley Ave. Pacoima, CA 91331
(818) 899-8300 Fax (818) 899-8335
www.utilityrefrigerator.com



UTILITY® IS PROUDLY MADE IN THE USA

RIFSC-GL