



UTILITY REFRIGERATOR

ROLL - IN / ROLL-THRU HOT FOOD CABINETS

MODEL NO.	DESCRIPTION
<input type="checkbox"/> RIHC-30-SS-1S	30" Wide, One Door
<input type="checkbox"/> RIHC-375-SS-1S	37.5" Wide, One Extra Wide Door
<input type="checkbox"/> RIHC-60-SS-2S	60" Wide, Two Doors
<input type="checkbox"/> RIHC-75-SS-2S	75" Wide, Two Extra Wide Doors
<input type="checkbox"/> RIHC-90-SS-3S	90" Wide, Three Doors
OPTIONS	MODEL NO. MODIFICATION
<input type="checkbox"/> Roll-Thru	Change "RI" to "RT"



MODEL RIHC-375-SS-1S

STANDARD FEATURES

Exclusive!

- Independent compartments and heating systems for each section allow multiple holding temperatures, prevent intermixing of food, flavors, or odors, and save energy
- Cabinet specially designed for holding hot food (not a modified refrigerator)
- 100% hi-temp fiberglass insulation for safety, durability and longevity
- Heat resistant, non-conductive phenolic thermal breaker
- Stainless steel sides, door, rails, top-mount, and interior
- Self-closing door hinges with stay-open feature at 120 degrees
- Door hinging: Single section-door hinged right
Two section-left door hinged left, right door hinged right
Three section-left door hinged left, center and right door hinged right
(Other configurations available-please specify)
- Standard width models for end-loading racks
- Extra-wide models for side-loading racks and dollies
- Heavy-gauge, reinforced stainless steel floor
- Stainless steel entrance ramps (removable without tools)
- Stainless steel cart guides and bumpers
- Full-length recessed Unigrip™ door handle
- Three hinges per door
- Easy to set, top-mounted digital control
- Temperature setpoint memory (keeps setting when power is off)
- Main power switch
- Heater "On" indicator light
- Humidity controlling vent in top of cabinet
- High temperature safety limit switch
- Low profile, 5" high top mount control housing
- 3 year parts, 1 year labor warranty

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel bottom
- Correctional facilities package
- Full-height, 12" top mount housing
- 115V or 208/230V (please specify voltage when ordering)
- Custom modifications (please specify)



UTILITY REFRIGERATOR

Manufacturers of Quality Refrigeration Equipment Since 1931

(818) 899-8300 Fax (818) 899-8335

www.utilityrefrigerator.com

PROUDLY MADE IN THE USA






Project _____ Item# _____

UTILITY REFRIGERATOR

ROLL - IN / ROLL-THRU HOT FOOD CABINETS

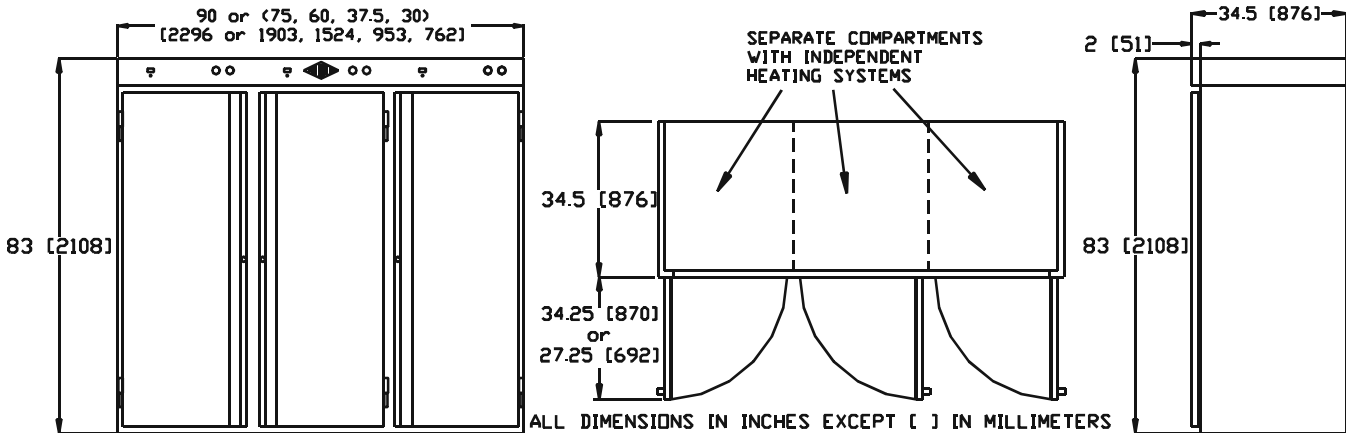

PRODUCT DATA (DATA IS FOR STD. MODELS: OPTIONS MAY CHANGE SPECIFICATIONS)	RIHC-30/ RTHC-30	RIHC-375/ RTHC-375	RIHC-60/ RTHC-60	RIHC-75/ RTHC-75	RIHC-90/ RTHC-90
Width (overall)	30"	37.5"	60"	75"	90"
Depth, overall (roll-in model)	34 1/2"	34 1/2"	34 1/2"	34 1/2"	34 1/2"
Depth, overall (roll-thru model)	36 1/2"	36 1/2"	36 1/2"	36 1/2"	36 1/2"
Height	83"	83"	83"	83"	83"
Depth (door open 90 deg.)	61 3/4"	68 3/4"	61 3/4"	68 3/4"	61 3/4"
Door opening (net width)	23 1/4"	30 3/4"	23 1/4"	30 3/4"	23 1/4"
Cart width, maximum	23"	30 1/2"	23"	30 1/2"	23"
Cart height, maximum	72"	72"	72"	72"	72"
Cart depth, maximum	29"	29"	29"	29"	29"
Voltage (dedicated circuit required)	115* or 208/230	115* or 208/230	208/230	208/230	208/230
*- Denotes standard voltage					
Heater wattage (total)	1500W	1500W	3000W	3000W	4500W
Amperage (total)	13.0/ 7.2	13.0/ 7.2	14.4	14.4	21.6
NEMA plug configuration	5-15 P/No cord	5-15 P/No cord	No cord	No cord	No cord
Ship weight (lbs.)	500	605	805	975	1150
Ship volume (cu. ft.)	69	84	130	160	191
Crated dims., roll-in (87" H, 38 1/2" D)	33 1/2"W	41"W	63 1/2"W	78 1/2"W	93 1/2"W
Crated dims., roll-thru (87" H, 40 1/2" D)	33 1/2"W	41"W	63 1/2"W	78 1/2"W	93 1/2"W

SPECIFICATIONS

Cabinet Exterior - Sides, door, rails, and top-mount are constructed of heavy gauge stainless steel. Exterior back and bottom are constructed of heavy gauge galvanized or optional stainless steel. Exterior digital thermometer. Cabinet body is 100% fiberglass insulation for superior energy efficiency, minimal heat conductivity, increased fire safety and longer life compared to polyurethane foam insulation.

Cabinet Interior - All heavy gauge stainless steel construction with radius corners. Stainless steel cart guides and bumpers. Stainless steel entrance ramps removable without tools. Separate compartments on two and three section models allow multiple holding temperatures and storage of different types of food without intermingling of aromas. Door openings protected by non-conductive, heat-resistant phenolic thermal breaker strip.

Doors - All welded, stainless steel construction. Integral full-length Unigrip™ recessed door handle. In order to prevent damage to door during installation, doors are equipped with self-closing lift-off cam hinges for easy door removal. Three heavy-duty hinges per door. Doors stay open at 120 degrees for easy access to interior. Insulation is fiberglass. See standard features on front side of sheet for standard hinging.

Heating System - Separate and independent heating systems and controls for each compartment save energy by applying heat only where needed. Blowerless convection heating system allows heat to radiate softly and evenly throughout cabinet. Two recessed, fully shielded stainless steel strip heating elements per section with heavy-duty stainless steel impact guards. Easy to set digital control. Cabinet designed to maintain holding temperatures between 120 and 180 degrees Fahrenheit. High temperature limit switch with manual reset prevents cabinet temperature from exceeding safe limit. Humidity controlling vent in ceiling of each compartment. 115 or 208/230 volt units available - please specify voltage when ordering (see table above for standard voltage).

In line with its policy to continually improve its products, Utility Refrigerator reserves the right to change materials and specifications without notice.



UTILITY REFRIGERATOR

Manufacturers of Quality Refrigeration Equipment
Since 1931
10029 Bradley Ave. Pacoima, CA 91331
(818) 899-8300 Fax (818) 899-8335
www.utilityrefrigerator.com



UTILITY® IS PROUDLY MADE IN THE USA

RIHC-GL