



Project \_\_\_\_\_  
 Item No. \_\_\_\_\_  
 Model No. \_\_\_\_\_  
 Quantity \_\_\_\_\_

CSI No. 114000

# COUNTER HEIGHT REFRIGERATOR - THREE SECTION

## STANDARD FEATURES:

### Construction/Cabinet

- Exterior front and sides – heavy gauge stainless steel
- Exterior back and bottom – heavy gauge galvanized
- Stainless steel compressor housing
- Stainless steel front, door, end mount, and interior
- Heavy-duty 6" adjustable stainless steel legs
- Cabinet body is foamed-in-place minimum 2-1/2" thick polyurethane insulation
- Fully covered interior with welded radius corners for easy cleaning
- Optional drawers hold two 12" x 20" pans or fractional pans (pans by others)
- Rugged drawer construction
- Welded stainless steel door handle or drawer pull
- Compressor housing located on left side (optional on right side)
- Stainless steel shelf clips and shelf standards
- One adjustable chrome plated wire shelf per section

### Doors

- Self-closing, lift off door hinges with stay-open feature at 120°
- Standard left door hinged left, center and right door hinged right (other configurations available)
- Energy saving condensate heater around door opening
- Snap-in magnetic door gasket
- Impact-resistant PVC breaker strip

### Refrigeration Package

- Slideout condensing unit - enables fast and easy service
- Expansion valve refrigeration system for superior recovery and temperature pulldown
- Low Pressure control – prevents compressor burnout in case of refrigerant loss
- R-513a, low GWP refrigerant for superior temperature recovery and pulldown
- Hot gas condensate evaporator quickly dissipates condensation using zero additional energy
- Receiver tank and service valves – allows reuse of refrigerant and enables rapid pulldown during times of peak demand
- Integrated sight glass – allows technicians to easily detect leaks or moisture without tools

### Control Systems & Warranty Coverage

- Digital temperature control – easily adjust setpoint between 35-40°F
- Master power switch
- One 9 foot electrical cord
- Warranty: 5 year compressor, 5 year parts, 1 year labor

### OPTIONS & ACCESSORIES:

- Stainless steel top (specify flat or marine edge type)
- Stainless steel back \_\_\_ bottom\_\_\_ (specify either or both)
- Additional chrome wire shelves (specify quantity) \_\_\_\_\_
- Stainless steel wire shelves in lieu of chrome shelves
- Tray slides (specify quantity)  
     " L " Type \_\_\_ Universal slides \_\_\_ " R " Type \_\_\_
- Digital temperature control & solenoid for remote models
- Refrigerant options for remote models-please specify refrigerant type
- Stainless steel curb base (specify 4" or 6" high)
- Temperature alarm
- 6" front locking casters in lieu of legs (no charge)
- 6" seismic legs
- 5" front locking casters
- 4" front locking casters
- 2 or 3 drawers in lieu of door (std depth 30", 60", or 90" sections only)
- Correctional facilities package
- Water-cooled condensing unit
- Interior LED lighting
- Marine secure latch
- ADA Height – stainless steel sub top changes overall height to 31.5" (requires 4" high casters)
- Glass doors



CHR-75-3S-D-EM  
 93" Overall Width, Three Doors  
 (shown with optional stainless steel flat top)

## MODEL GUIDE

Model Number	Description
<input type="checkbox"/> CHR-75-3S-D-EM	93" Overall Width, Three Doors
<input type="checkbox"/> CHR-90-3S-D-EM	108" Overall Width, Three Doors
Options	Model Number Modification
<input type="checkbox"/> Remote Refrigeration	Delete suffix "EM" from model number
<input type="checkbox"/> Pass-Thru	Add prefix "PT" to model number
<input type="checkbox"/> Narrow Depth	Change "D" to "N"

## AGENCY APPROVALS:




Intertek



Intertek



# COUNTER HEIGHT REFRIGERATOR - THREE SECTION

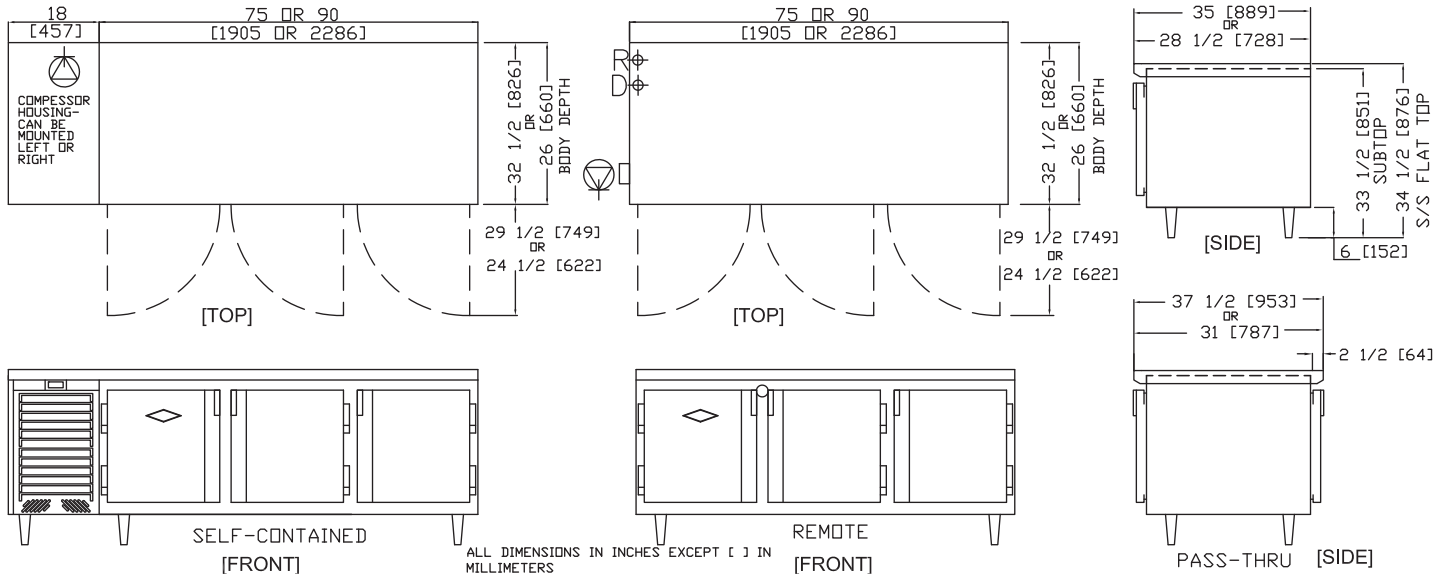

PRODUCT DATA	CHR-75 Standard Depth	CHR-75 Narrow Depth	CHR-90 Standard Depth	CHR-90 Narrow Depth
<b>KEYDIMENSIONS</b>				
Width, Self-Contained (overall)	93.0"	93.0"	108.0"	108.0"
Width, Remote (overall)	75.0"	75.0"	90.0"	90.0"
Depth (overall)	34.5"	28.0"	34.5"	28.0"
Depth Pass-Thru Models (overall)	36.5"	30.0"	36.5"	30.0"
Height (overall inc. legs; w/ subtop)	33.5"	33.5"	33.5"	33.5"
Height (overall inc. legs; w/ optional s/s finished top)	34.5"	34.5"	34.5"	34.5"
<b>CAPACITY</b>				
Capacity (cu.ft.)	25	19	30	23
<b>ELECTRICAL</b>				
Voltage (dedicated circuit required)	115	115	115	115
Amperage (self-contained)	6.7	6.7	9.7	9.7
Amperage (remote refrigeration)	5.4	5.4	5.7	5.7
BTU requirement*, remote	2097	2013	2285	2191
NEMA Plug Configuration (self-contained only)	5-15P	5-15P	5-15P	5-15P
Horsepower (self-contained)	1/4	1/4	1/3	1/3
<b>SHIPPING</b>				
ShipWeight, Self-Contained (lbs.)	750	700	875	825
ShipWeight, Remote (lbs.)	620	570	745	695
Ship Volume, Self-Contained (cu.ft.)	107	94	124	108
Ship Volume, Remote (cu.ft.)	88	77	104	91
Crated Dimensions, Self-Contained (39" H)	99"W x 48"D	99"W x 42"D	114"W x 48"D	114"W x 42"D
Crated Dimensions, Remote (39" H)	81"W x 48"D	81"W x 42"D	96"W x 48"D	96"W x 42"D

\*90°F ambient, 20°F evaporator, 20' max. line length.

Data is for standard models: options may change specifications.

## UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605

Telephone: (818) 764-6200 • Fax: (818) 764-6211

[www.utilityrefrigerator.com](http://www.utilityrefrigerator.com)

*DUE TO CONTINUOUS PRODUCT IMPROVEMENTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.*

©/™/® Utility Refrigerator



WARNING - This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is [are] known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

UR-CHR3 | MU