



Project _____
 Item No. _____
 Model No. _____
 Quantity _____

CSI No. 114000

LOW HEIGHT EQUIPMENT STAND REFRIGERATOR - TWO SECTION



LHR-55-4D (remote)
 55" Overall Width, Four Drawers
 (shown with optional stainless steel
 equipment top)



LHR-55-4D-EM
 55" Overall Width, Four Drawers
 (shown with optional stainless steel
 flat top)

MODEL GUIDE

| Model Number | Description |
|---|---|
| <input type="checkbox"/> LHR-55-4D-EM | 73" Wide, Four Drawers, 5 Pans Front-to-Back |
| <input type="checkbox"/> LHR-55T-4D-EM | 73" Wide, Four Drawers, 5 Pans Front-to-Back, Tall Body |
| <input type="checkbox"/> LHR-60-4D-EM | 78" Wide, Four Drawers, 7 Pans Front-to-Back |
| <input type="checkbox"/> LHR-60T-4D-EM | 78" Wide, Four Drawers, 7 Pans Front-to-Back, Tall Body |
| <input type="checkbox"/> LHR-66-4D-EM | 84" Wide, Four Drawers, 8 Pans FB/SBS |
| <input type="checkbox"/> LHR-66T-4D-EM | 84" Wide, Four Drawers, 8 Pans FB/SBS, Tall Body |
| <input type="checkbox"/> LHR-72-4D-EM | 90" Wide, Four Drawers, 8 Pans Side-by-Side |
| <input type="checkbox"/> LHR-72T-4D-EM | 90" Wide, Four Drawers, 8 Pans Side-by-Side, Tall Body |
| Options | Model Number Modification |
| <input type="checkbox"/> Remote Refrigeration | Delete suffix "EM" from model number |

STANDARD FEATURES:

Construction/Cabinet

- Exterior front and sides – heavy gauge stainless steel
- Exterior back and bottom – heavy gauge galvanized
- Stainless steel compressor housing
- Stainless steel front, drawer, rails and end-mount
- Heavy-duty 6" adjustable stainless steel legs
- Cabinet body is foamed-in-place minimum 2-1/2" thick polyurethane insulation
- Fully covered interior with welded radius corners for easy cleaning

Drawers

- Drawers hold 12" x 20" pans or fractional pans (pans by others)
- "T" models hold 6" deep pans in all drawers (standard models hold 6" pans in top drawers only)
- Energy saving condensate heater around drawer opening
- Reinforced top to support heavy restaurant equipment
- Rugged drawer construction
- Welded stainless steel drawer pull
- Specially insulated top for efficient cooling when used with cooking equipment
- Low cabinet height places cooking equipment at ergonomically convenient level
- Snap-in magnetic drawer gasket
- Impact-resistant PVC breaker strip

Refrigeration Package

- Slideout condensing unit - enables fast and easy service
- Expansion valve refrigeration system for superior recovery and temperature pulldown
- Low Pressure control – prevents compressor burnout in case of refrigerant loss
- R-513a, low GWP refrigerant for superior temperature recovery and pulldown
- Hot gas condensate evaporator quickly dissipates condensation using zero additional energy
- Receiver tank and service valves – allows reuse of refrigerant and enables rapid pulldown during times of peak demand
- Integrated sight glass – allows technicians to easily detect leaks or moisture without tools

Control Systems & Warranty Coverage

- Digital temperature control – easily adjust setpoint between 35-40°F
- Master power switch
- One 9 foot electrical cord
- Warranty: 5 year compressor, 5 year parts, 1 year labor

OPTIONS & ACCESSORIES:

- Stainless steel top (specify equipment or marine edge type)
- Stainless steel back ___ bottom ___ (specify either or both)
- Digital temperature control & solenoid for remote models
- Refrigerant options for remote models-please specify refrigerant type
- Stainless steel curb base (specify 4" or 6" high)
- Temperature alarm
- 6" front locking casters in lieu of legs (no charge)
- 4" front locking casters in lieu of legs
- 5" and 4" casters
- 6" seismic legs
- Correctional facilities package
- Water-cooled condensing unit
- Door in lieu of drawers (specify hinging)

AGENCY APPROVALS:




Intertek




Intertek




LOW HEIGHT EQUIPMENT STAND REFRIGERATOR - TWO SECTION

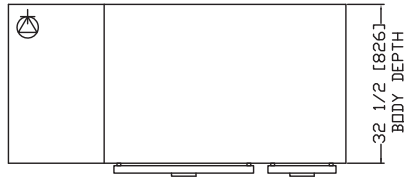


[TOP]

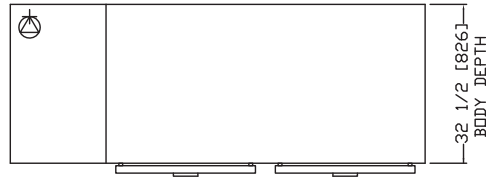


[TOP]




[SIDE] - STANDARD MODEL



[FRONT]

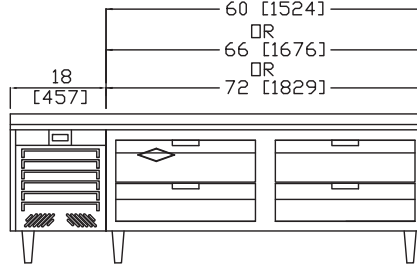

[FRONT]



[SIDE] - "T" MODEL

ALL DIMENSIONS IN INCHES EXCEPT [] IN MILLIMETERS

| PRODUCT DATA | LHR-55 | LHR-60 | LHR-66 | LHR-72 |
|---|---------------|---------------|---------------|---------------|
| KEY DIMENSIONS | | | | |
| Width, Self-Contained (overall) | 73.0" | 78.0" | 84.0" | 90.0" |
| Width, Remote (overall) | 55.0" | 60.0" | 66.0" | 72.0" |
| Depth (overall) | 34.5" | 34.5" | 34.5" | 34.5" |
| Height, Standard Model (overall inc. legs) | 26.0" | 26.0" | 26.0" | 26.0" |
| Height, "T" Model (overall inc. legs) | 28.0" | 28.0" | 28.0" | 28.0" |
| CAPACITY | | | | |
| Pan Capacity, 12" x 20" Pans (by others) | 6 | 7 | 8 | 8 |
| ELECTRICAL | | | | |
| Voltage (dedicated circuit required) | 115 | 115 | 115 | 115 |
| Amperage (self-contained) | 7.0 | 6.2 | 7.0 | 7.0 |
| Amperage (remote refrigeration) | 4.8 | 4.0 | 4.8 | 4.8 |
| BTU requirement*, remote | 1610 | 1280 | 1707 | 1822 |
| NEMA Plug Configuration (self-contained only) | 5-15P | 5-15P | 5-15P | 5-15P |
| Horsepower (self-contained) | 1/4 | 1/4 | 1/4 | 1/4 |
| SHIPPING | | | | |
| Ship Weight, Self-Contained (lbs.) | 620 | 630 | 660 | 710 |
| Ship Weight, Remote (lbs.) | 500 | 510 | 540 | 590 |
| Ship Volume, Self-Contained (cu. ft.) | 65 | 69 | 74 | 79 |
| Ship Volume, Remote (cu. ft.) | 50 | 55 | 60 | 64 |
| Crated Dimensions, Self-Contained (32" H) | 79" W x 42" D | 84" W x 42" D | 90" W x 42" D | 96" W x 42" D |
| Crated Dimensions, Remote (32" H) | 61" W x 42" D | 66" W x 42" D | 72" W x 42" D | 78" W x 42" D |

*90°F ambient, 20°F evaporator, 20' max. line length

Data is for standard models: options may change specifications.

UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605

Telephone: (818) 764-6200 • Fax: (818) 764-6211

www.utilityrefrigerator.com

DUE TO CONTINUOUS PRODUCT IMPROVEMENTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

©/™/® Utility Refrigerator



WARNING - This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is [are] known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

UR-LHR2