



Project \_\_\_\_\_  
 Item No. \_\_\_\_\_  
 Model No. \_\_\_\_\_  
 Quantity \_\_\_\_\_

CSI No. 114000

# REACH-IN REFRIGERATOR - THREE SECTION



R-75-SS-3S-D  
 75" Wide, S/S Exterior and Interior

## MODEL GUIDE

Model Number	Description
<input type="checkbox"/> R-75-SS-3S-D	75" Wide, S/S Exterior and Interior
<input type="checkbox"/> R-75-SA-3S-D	75" Wide, S/S Exterior, Aluminum Interior
<input type="checkbox"/> R-90-SS-3S-D	90" Wide, S/S Exterior and Interior
<input type="checkbox"/> R-90-SA-3S-D	90" Wide, S/S Exterior, Aluminum Interior
Options	Model Number Modification
<input type="checkbox"/> Remote Refrigeration	Add suffix "X" to model number
<input type="checkbox"/> Half Doors	Change "3S" to "6S"
<input type="checkbox"/> Pass-Thru	Add prefix "PT" to model number
<input type="checkbox"/> Narrow Depth	Change suffix "D" to "N"
<input type="checkbox"/> Glass Door	Change "3S" to "3G"

## AGENCY APPROVALS:



Intertek



Intertek

## STANDARD FEATURES:

### Construction/Cabinet

- Exterior front and sides – heavy gauge stainless steel
- Exterior back and bottom – heavy gauge galvanized
- Stainless steel compressor housing
- Stainless steel front, door, and grille
- Heavy-duty 6" adjustable stainless steel legs
- Cabinet body is foamed-in-place minimum 2-1/2" thick polyurethane insulation
- Fully coved interior with welded radius corners for easy cleaning
- Interior LED lighting
- Stainless steel shelf clips and shelf standards
- Four adjustable chrome plated wire shelves per section

### Doors

- Self-closing, lift off door hinges with stay-open feature at 120°
- Standard left door hinged left, center and right door hinged right (other configurations available)
- Full-length, one-piece recessed Unigrip™ door handle (solid door models)
- Heavy-duty, built-in security cylinder door lock (solid door models)
- Energy saving condensate heater around door opening
- Snap-in magnetic door gasket
- Impact-resistant PVC breaker strip

### Refrigeration Package

- Expansion valve refrigeration system for superior recovery and temperature pulldown
- Low Pressure control – prevents compressor burnout in case of refrigerant loss
- Top-mounted compressor
- R-513a, low GWP refrigerant for superior temperature recovery and pulldown
- Hot gas condensate evaporator quickly dissipates condensation using zero additional energy
- Receiver tank and service valves – allows reuse of refrigerant and enables rapid pulldown during times of peak demand
- Integrated sight glass – allows technicians to easily detect leaks or moisture without tools

### Control Systems & Warranty Coverage


- Digital temperature control – easily adjust setpoint between 35-40°F
- Master power switch
- One 9 foot electrical cord
- Warranty: 5 year compressor, 5 year parts, 1 year labor

### OPTIONS & ACCESSORIES:

- Stainless steel back \_\_\_ top\_\_\_ bottom\_\_\_ (specify all that apply)
- Drawers in lieu of lower half door (requires half-door option)
- Additional chrome wire shelves (specify quantity) \_\_\_\_\_
- Stainless steel wire shelves in lieu of chrome shelves
- Tray slides (specify quantity)  
     "L"Type \_\_\_ Universal slides \_\_\_ "R"Type \_\_\_
- Digital temperature control & solenoid for remote models
- Refrigerant options for remote models-please specify refrigerant type
- Stainless steel curb base (specify 4" or 6" high)
- Temperature alarm
- 6" front locking casters in lieu of legs (no charge)
- 4" front locking casters in lieu of legs
- 6" seismic legs
- Correctional facilities package
- Top-mounted evaporator coil (std. depth units only)
- Water-cooled condensing unit
- 5" high top-mount (remote compressor models)



# REACH-IN REFRIGERATOR - THREE SECTION

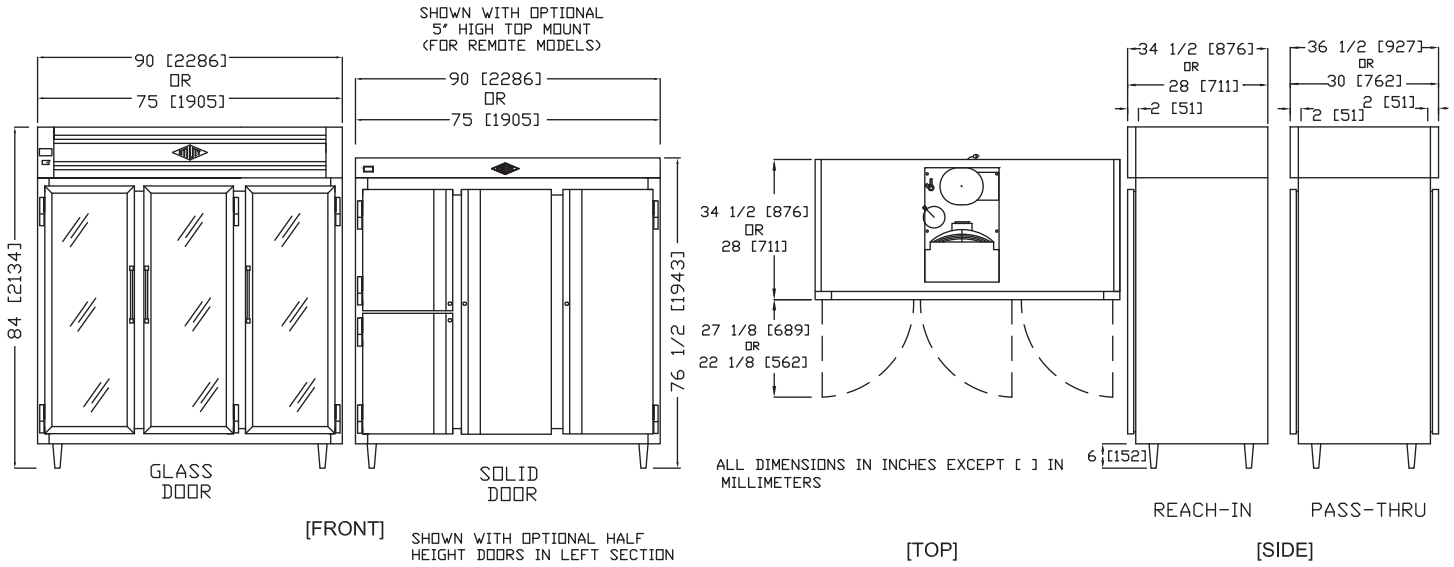

PRODUCT DATA	R-75 Series Standard Depth	R-75 Series Narrow Depth	R-90 Series Standard Depth	R-90 Series Narrow Depth
<b>KEY DIMENSIONS</b>				
Width (overall)	75.0"	75.0"	90.0"	90.0"
Depth (overall)	34.5"	28.0"	34.5"	28.0"
Depth Pass-Thru Models (overall)	36.5"	30.0"	36.5"	30.0"
Height (overall inc. legs)	84.0"	84.0"	84.0"	84.0"
Door Opening (net width)	18.25"	18.25"	23.25"	23.25"
Door Opening (net height)	57.25"	57.25"	57.25"	57.25"
Half Door Opening (net ht.)	26.75"	26.75"	26.75"	26.75"
<b>CAPACITY</b>				
Capacity (cu. ft.)	67	51	81	62
Number of Shelves	12	12	12	12
Shelf Area (sq. ft., including bottom)	61	46	75	56
<b>ELECTRICAL</b>				
Voltage (dedicated circuit required)	115	115	115	115
<b>SOLID DOOR MODELS</b>				
Amperage solid door models (self-contained)	14.6	13.8	17.3	14.6
Amperage solid door models (remote refrigeration)	10.9	10.1	10.9	10.9
BTU requirement*, remote (solid door models)	3715	3266	4000	3903
<b>GLASS DOOR MODELS</b>				
Amperage glass door models (self-contained)	17.9	17.9	17.9	17.9
Amperage glass door models (remote refrigeration)	10.9	10.9	10.9	10.9
BTU requirement*, remote (glass door models)	4420	4279	4903	4740
NEMA Plug Configuration** (self-contained only)	5-20 P	5-20 P	5-20 P	5-20 P
Horsepower (self-contained)	1/2	1/2	1/2	1/2
<b>SHIPPING</b>				
Ship Weight (lbs.)	760	700	950	875
Ship Volume, Standard Depth (cu. ft.)	196	171	232	203
Crated Dimensions (87" H)	81"W x 48"D	81"W x 42"D	96"W x 48"D	96"W x 42"D

\*90°F ambient, 20°F evaporator, 20' max. line length \*\* R-75 and R-90 series models with glass doors are hardwired and do not have a cord and plug Data is for standard models; options may change specifications.

## UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605

Telephone: (818) 764-6200 • Fax: (818) 764-6211

[www.utilityrefrigerator.com](http://www.utilityrefrigerator.com)

*DUE TO CONTINUOUS PRODUCT IMPROVEMENTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.*

©/™/® Utility Refrigerator



WARNING - This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is [are] known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

UR-R3 | MU