



Project _____
 Item No. _____
 Model No. _____
 Quantity _____

CSI No. 114000

ROLL-IN FREEZER "H" SERIES- FOR 72" HIGH CARTS



RIF-30-SS-15-H
 30" Wide, One Narrow Door,
 S/S Exterior and Interior

MODEL GUIDE

| Model Number | Description |
|---|--|
| <input type="checkbox"/> RIF-30-SS-15-H | 30" Wide, One Narrow Door, S/S Exterior and Interior |
| <input type="checkbox"/> RIF-37.5-SS-15-H | 37.5" Wide, One Extra Wide Door, S/S Exterior and Interior |
| <input type="checkbox"/> RIF-60-SS-2S-H | 60" Wide, Two Narrow Doors, S/S Exterior and Interior |
| <input type="checkbox"/> RIF-68-SS-2S-H | 68" Wide, Two Doors, S/S Exterior and Interior |
| <input type="checkbox"/> RIF-75-SS-2S-H | 75" Wide, Two Extra Wide Doors, S/S Exterior and Interior |
| <input type="checkbox"/> RIF-90-SS-3S-H | 90" Wide, Three Narrow Doors, S/S Exterior and Interior |
| <input type="checkbox"/> RIF-100-SS-3S-H | 100" Wide, Three Doors, S/S Exterior and Interior |
| Options | Model Number Modification |
| <input type="checkbox"/> Remote Refrigeration | Add suffix "X" to model number |
| <input type="checkbox"/> Roll-Thru | Add prefix "RT" to model number |
| <input type="checkbox"/> Glass Door | Change "S" to "G" |

STANDARD FEATURES:

Construction/Cabinet

- Exterior front and sides – heavy gauge stainless steel
- Exterior back and bottom – heavy gauge galvanized
- Stainless steel compressor housing
- Stainless steel front, door, and grille
- Heavy-duty removable stainless steel cart ramp
- Cabinet body is foamed-in-place minimum 2-1/2" thick polyurethane insulation
- Fully coved interior with welded radius corners for easy cleaning
- Interior LED lighting

Doors

- Self-closing, lift off door hinges with stay-open feature at 120°
- Full-length, one-piece recessed Unigrip™ door handle (solid door models)
- Heavy-duty, built-in security cylinder door lock (solid door models)
- Energy saving condensate heater around door opening
- Snap-in magnetic door gasket
- Impact-resistant PVC breaker strip

Refrigeration Package

- Expansion valve refrigeration system for superior recovery and temperature pull-down
- Low pressure control – prevents compressor burnout in case of refrigerant loss
- Top-mounted compressor
- R-449a, low GWP refrigerant for superior temperature recovery and pull-down
- Hot gas condensate evaporator quickly dissipates condensation using zero additional energy
- Receiver tank and service valves – allows reuse of refrigerant and enables rapid pull-down during times of peak demand
- Integrated sight glass – allows technicians to easily detect leaks or moisture without tools

Control Systems & Warranty Coverage

- Digital temperature control – easily adjust setpoint between +5 to -5°F
- Warranty: 5 year compressor, 5 year parts, 1 year labor

OPTIONS & ACCESSORIES:


- Stainless steel back ___ top ___ bottom___ (specify all that apply)
- Digital temperature control & solenoid for remote models
- Refrigerant options for remote models-please specify refrigerant type
- Temperature alarm
- Correctional facilities package
- Water-cooled condensing unit
- Glass doors
- Double-deep configuration
- Shelving options
- Reach-in half doors on rear side of roll-thru model
- Quick disconnect condensing units (select models; contact factory for details)

AGENCY APPROVALS:





ROLL-IN FREEZER "H" SERIES- FOR 72" HIGH CARTS

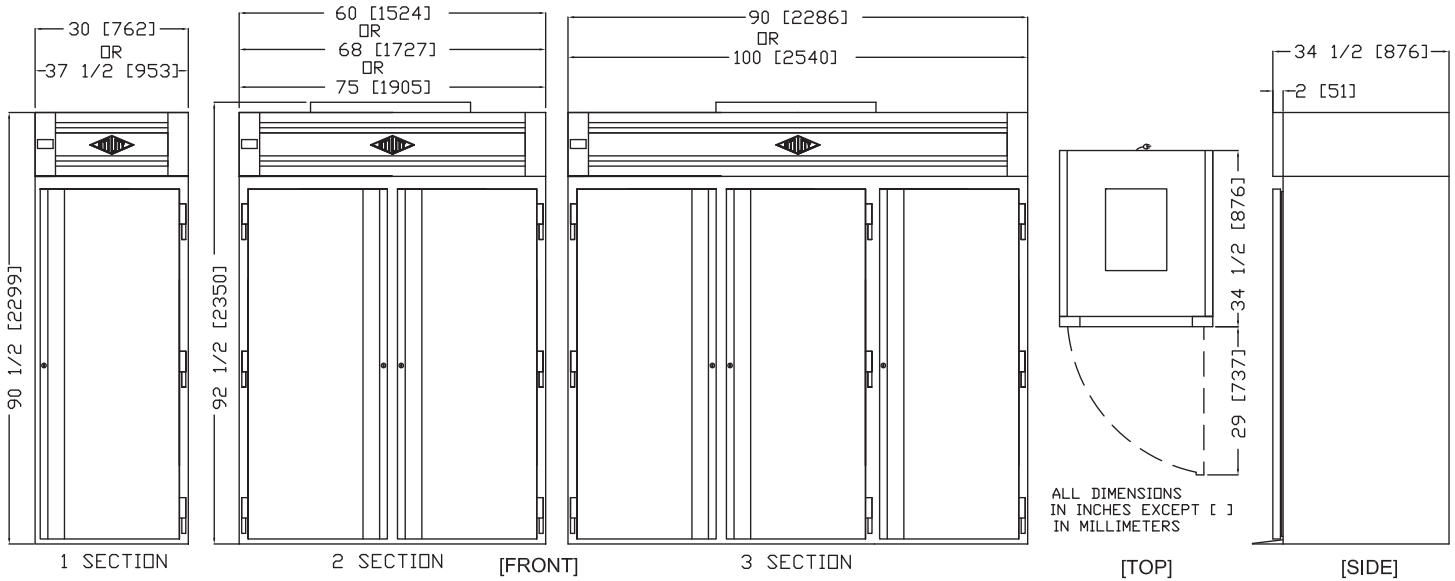

| PRODUCT DATA | RIF-30 | RIF-375 | RIF-60 | RIF-68 | RIF-75 | RIF-90 | RIF-100 |
|---|--------------------|--------------------|---------------------|---------------------|---------------------|---------------------|----------------------|
| KEY DIMENSIONS | | | | | | | |
| Width (overall) | 30.0" | 37.5" | 60.0" | 68.0" | 75.0" | 90.0" | 100.0" |
| Depth (overall) | 34.5" | 34.5" | 34.5" | 34.5" | 34.5" | 34.5" | 34.5" |
| Depth Roll-Thru Models (overall) | 36.5" | 36.5" | 36.5" | 36.5" | 36.5" | 36.5" | 36.5" |
| Height (overall) | 90.5" | 90.5" | 92.5" | 92.5" | 92.5" | 92.5" | 92.5" |
| Maximum Cart Height | 72.0" | 72.0" | 72.0" | 72.0" | 72.0" | 72.0" | 72.0" |
| Maximum Cart Width | 23.0" | 30.5" | 23.0" | 27.0" | 30.5" | 23.0" | 27.0" |
| Maximum Cart Depth | 29.0" | 29.0" | 29.0" | 29.0" | 29.0" | 29.0" | 29.0" |
| CAPACITY | | | | | | | |
| Capacity (cu. ft.) | 28 | 36 | 62 | 71 | 79 | 96 | 108 |
| ELECTRICAL | | | | | | | |
| Voltage (dedicated circuit required) | 115 | 115 | 115-208/230 | 115-208/230 | 115-208/230 | 115-208/230 | 115-208/230 |
| Amperage (self-contained) | 8.8 | 10.9 | 18.9 | 18.9 | 13.3 | 14.9 | 14.9 |
| Amperage (remote refrigeration) | 8.7 | 8.9 | 16.4 | 16.4 | 10.7 | 18.1 | 18.1 |
| BTU requirement*, remote | 2037 | 2408 | 3298 | 3643 | 3999 | 4506 | 4822 |
| NEMA Plug Configuration (self-contained only) | 5-15P | 5-15P | NO CORD/PLUG | NO CORD/PLUG | NO CORD/PLUG | NO CORD/PLUG | NO CORD/PLUG |
| Horsepower (self-contained) | 1/2 | 3/4 | 3/4 | 3/4 | 1 | 1 | 1 |
| SHIPPING | | | | | | | |
| Ship Weight (lbs.) | 705 | 785 | 920 | 990 | 1175 | 1350 | 1500 |
| Ship Volume, Standard Depth (cu. ft.) | 99 | 116 | 183 | 206 | 225 | 267 | 278 |
| Crated Dimensions | 36"W x 48"D x 99"H | 42"W x 48"D x 99"H | 66"W x 48"D x 100"H | 74"W x 48"D x 100"H | 81"W x 48"D x 100"H | 96"W x 48"D x 100"H | 106"W x 48"D x 100"H |

*90°F ambient, -15°F evaporator, 20' max. line length

Data is for standard models: options may change specifications.

UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605

Telephone: (818) 764-6200 • Fax: (818) 764-6211

www.utilityrefrigerator.com

DUE TO CONTINUOUS PRODUCT IMPROVEMENTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

©/™/® Utility Refrigerator



WARNING - This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is [are] known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

UR-RIFH | MU