



Project \_\_\_\_\_  
 Item No. \_\_\_\_\_  
 Model No. \_\_\_\_\_  
 Quantity \_\_\_\_\_

CSI No. 114000

# ROLL-IN REFRIGERATOR "L" SERIES - FOR 66" HIGH CARTS



RIR-30-SS-15-L  
 30" Wide, One Narrow Door,  
 S/S Exterior and Interior

## MODEL GUIDE

Model Number	Description
<input type="checkbox"/> RIR-30-SS-15-L	30" Wide, One Narrow Door, S/S Exterior and Interior
<input type="checkbox"/> RIR-37.5-SS-15-L	37.5" Wide, One Extra Wide Door, S/S Exterior and Interior
<input type="checkbox"/> RIR-60-SS-25-L	60" Wide, Two Narrow Doors, S/S Exterior and Interior
<input type="checkbox"/> RIR-68-SS-25-L	68" Wide, Two Doors, S/S Exterior and Interior
<input type="checkbox"/> RIR-75-SS-25-L	75" Wide, Two Extra Wide Doors, S/S Exterior and Interior
<input type="checkbox"/> RIR-90-SS-35-L	90" Wide, Three Narrow Doors, S/S Exterior and Interior
<input type="checkbox"/> RIR-100-SS-35-L	100" Wide, Three Doors, S/S Exterior and Interior
Options	Model Number Modification
<input type="checkbox"/> Remote Refrigeration	Add suffix "X" to model number
<input type="checkbox"/> Roll-Thru	Add prefix "RT" to model number
<input type="checkbox"/> Glass Door	Change "S" to "G"

## STANDARD FEATURES:

### Construction/Cabinet

- Exterior front and sides – heavy gauge stainless steel
- Exterior back and bottom – heavy gauge galvanized
- Stainless steel compressor housing
- Stainless steel front, door, and grille
- Heavy-duty removable stainless steel cart ramp
- Cabinet body is foamed-in-place minimum 2-1/2" thick polyurethane insulation
- Fully covered interior with welded radius corners for easy cleaning
- Interior LED lighting

### Doors

- Self-closing, lift off door hinges with stay-open feature at 120°
- Full-length, one-piece recessed Unigrip™ door handle (solid door models)
- Heavy-duty, built-in security cylinder door lock (solid door models)
- Energy saving condensate heater around door opening
- Snap-in magnetic door gasket
- Impact-resistant PVC breaker strip

### Refrigeration Package

- Expansion valve refrigeration system for superior recovery and temperature pull-down
- Low pressure control – prevents compressor burnout in case of refrigerant loss
- Top-mounted compressor
- R-513a, low GWP refrigerant for superior temperature recovery and pull-down
- Hot gas condensate evaporator quickly dissipates condensation using zero additional energy
- Receiver tank and service valves – allows reuse of refrigerant and enables rapid pull-down during times of peak demand
- Integrated sight glass – allows technicians to easily detect leaks or moisture without tools

### Control Systems & Warranty Coverage

- Digital temperature control – easily adjust setpoint between 35-40°F
- Master power switch
- One 9 foot electrical cord
- Warranty: 5 year compressor, 5 year parts, 1 year labor

## OPTIONS & ACCESSORIES:

- Stainless steel back \_\_\_ top \_\_\_ bottom \_\_\_ (specify all that apply)
- Digital temperature control & solenoid for remote models
- Refrigerant options for remote models-please specify refrigerant type
- Temperature alarm
- Correctional facilities package
- Water-cooled condensing unit
- Glass doors
- Double-deep configuration
- Shelving options
- Reach-in half doors on rear side of roll-thru model
- Quick disconnect condensing units (select models; contact factory for details)

## AGENCY APPROVALS:




Intertek



Intertek



# ROLL-IN REFRIGERATOR "L" SERIES - FOR 66" HIGH CARTS

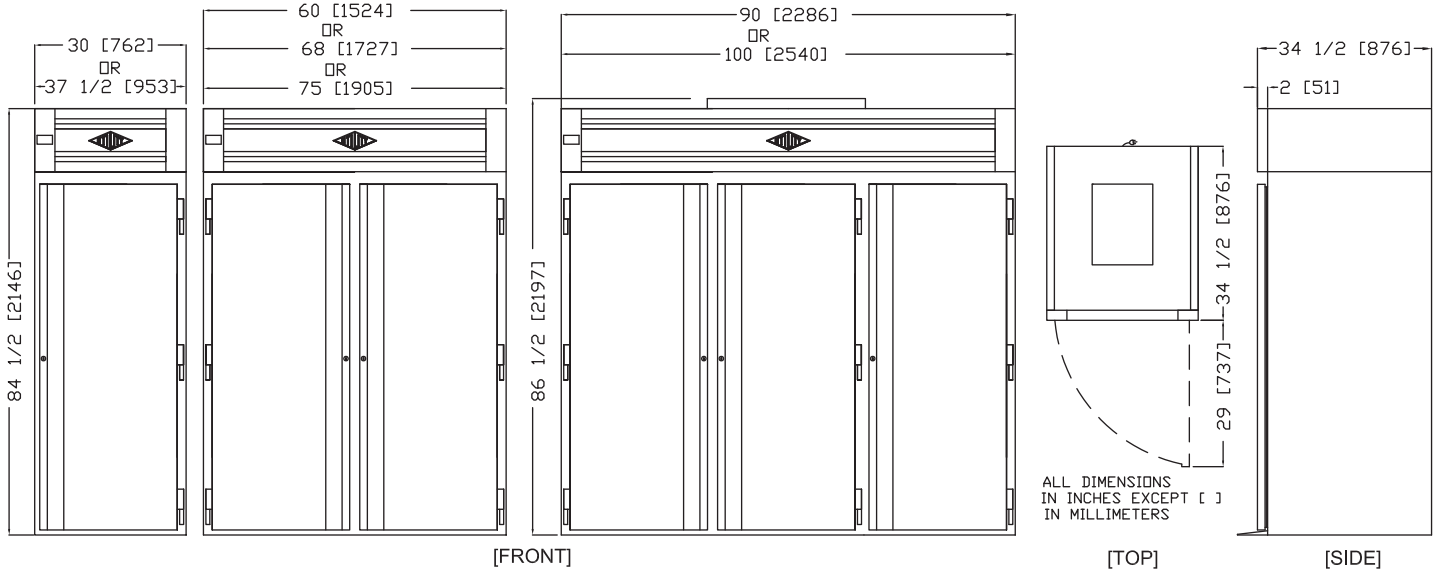

PRODUCT DATA	RIR-30	RIR-375	RIR-60	RIR-68	RIR-75	RIR-90	RIR-100
<b>KEY DIMENSIONS</b>							
Width (overall)	30.0"	37.5"	60.0"	68.0"	75.0"	90.0"	100.0"
Depth (overall)	34.5"	34.5"	34.5"	34.5"	34.5"	34.5"	34.5"
Depth Roll-Thru Models (overall)	36.5"	36.5"	36.5"	36.5"	36.5"	36.5"	36.5"
Height (overall)	84.5"	84.5"	84.5"	84.5"	84.5"	86.5"	86.5"
Maximum Cart Height	66.0"	66.0"	66.0"	66.0"	66.0"	66.0"	66.0"
Maximum Cart Width	23.0"	30.5"	23.0"	27.0"	30.5"	23.0"	27.0"
Maximum Cart Depth	29.0"	29.0"	29.0"	29.0"	29.0"	29.0"	29.0"
<b>CAPACITY</b>							
Capacity (cu. ft.)	25	33	57	65	72	88	99
<b>ELECTRICAL</b>							
Voltage (dedicated circuit required)	115	115	115	115	115	115	115
Amperage (self-contained)	9.4	9.6	10.3	10.5	11.3	20.4	20.7
Amperage (remote refrigeration)	6.0	6.2	7.8	7.8	8.8	10.3	10.6
BTU requirement*, remote	1494	1732	2336	2564	3150	3512	3795
NEMA Plug Configuration (self-contained only)	5-15P	5-15P	5-15P	5-15P	5-15P	NO CORD/PLUG	NO CORD/PLUG
Horsepower (self-contained)	1/3	1/3	1/2	1/2	1/2	3/4	3/4
<b>SHIPPING</b>							
Ship Weight (lbs.)	600	680	730	800	910	1100	1250
Ship Volume, Standard Depth (cu. ft.)	94	110	172	193	212	256	267
Crated Dimensions	36" W x 48" D x 94" H	42" W x 48" D x 94" H	66" W x 48" D x 94" H	74" W x 48" D x 94" H	81" W x 48" D x 94" H	96" W x 48" D x 96" H	106" W x 48" D x 96" H

\*90°F ambient, 20°F evaporator, 20' max. line length

Data is for standard models: options may change specifications.

## UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605

Telephone: (818) 764-6200 • Fax: (818) 764-6211

[www.utilityrefrigerator.com](http://www.utilityrefrigerator.com)

*DUE TO CONTINUOUS PRODUCT IMPROVEMENTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.*

©/™/® Utility Refrigerator



WARNING - This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is [are] known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

UR-RIRL | MU