



Project \_\_\_\_\_ Item# \_\_\_\_\_

# UTILITY REFRIGERATOR

## THREE SECTION SOLID DOOR REACH-IN FREEZER



**MODEL F-90-SS-3S-D**  
SHOWN WITH OPTIONAL HINGING  
(LEFT DOOR HINGED RIGHT)

MODEL NO.	DESCRIPTION
<input type="checkbox"/> F-75-SS-1S-D	75" Wide, S/S Exterior & Interior
<input type="checkbox"/> F-75-SA-1S-D	75" Wide, S/S Exterior, Aluminum Interior
<input type="checkbox"/> F-75-AA-1S-D	75" Wide, S/S Front, Alum. Sides & Interior
<input type="checkbox"/> F-90-SS-1S-D	90" Wide, S/S Exterior & Interior
<input type="checkbox"/> F-90-SA-1S-D	90" Wide, S/S Exterior, Aluminum Interior
<input type="checkbox"/> F-90-AA-1S-D	90" Wide, S/S Front, Alum. Sides & Interior

OPTIONS	MODEL NO. MODIFICATION
<input type="checkbox"/> Remote	Add suffix "X" to model number
<input type="checkbox"/> Half Doors	Change "3S" to "6S"
<input type="checkbox"/> Pass-Thru	Add prefix "PT" to model number
<input type="checkbox"/> Narrow Depth	Change "D" to "N"

### STANDARD FEATURES

- Stainless steel front, door, rails, mullions and top-mount
- Self-closing door hinges with stay-open feature at 120 degrees (std. door hinging is left door hinged left, center and right doors hinged right; other configurations available)
- Full-length, one-piece recessed Unigrip™ door handle
- Heavy-duty, built-in security cylinder door lock
- Automatic interior light (switch concealed in door hinge)
- Four adjustable chrome plated wire shelves per full door opening
- Stainless steel shelf clips and shelf standards
- Adjustable 6" heavy-duty legs or 6" casters in lieu of legs
- Condensate heaters around door openings
- Snap-in magnetic door gaskets
- Expansion valve refrigeration system
- Top-mounted compressor
- Digital temperature control
- R-404a refrigerant for superior temperature recovery and pulldown
- Condensate evaporator
- Impact-resistant PVC breaker strip
- Automatic defrost (defrost timer optional on remote models)
- Junction box provided for power supply connection
- 5 year compressor, 3 year parts, 1 year labor warranty

### OPTIONS & ACCESSORIES

- Stainless steel back \_\_\_ and/or bottom \_\_\_ (specify either or both)
- Drawers in lieu of lower half door (requires half-door option)
- Additional chrome wire shelves (specify quantity) \_\_\_\_\_
- Stainless steel wire shelves in lieu of chrome shelves
- Tray slides "L" Type \_\_\_ Universal \_\_\_ "R" Type \_\_\_ (specify quantity)
- Thermostat & solenoid (remote models)
- Stainless steel curb base (specify 4" or 6" high)
- Temperature alarm
- Defrost timer on remote models (shipped loose or installed)
- 6" front locking casters in lieu of legs (no charge)
- 6" seismic legs
- Correctional facilities package
- Water-cooled condensing unit
- 5" high top-mount (remote models)
- Custom modifications (please specify)



**UTILITY REFRIGERATOR**

Manufacturers of The Finest Quality Refrigeration Equipment  
Since 1931

www.utilityrefrigerator.com

PROUDLY MADE IN THE USA






Project \_\_\_\_\_ Item# \_\_\_\_\_

# UTILITY REFRIGERATOR

## THREE SECTION SOLID DOOR REACH-IN FREEZER

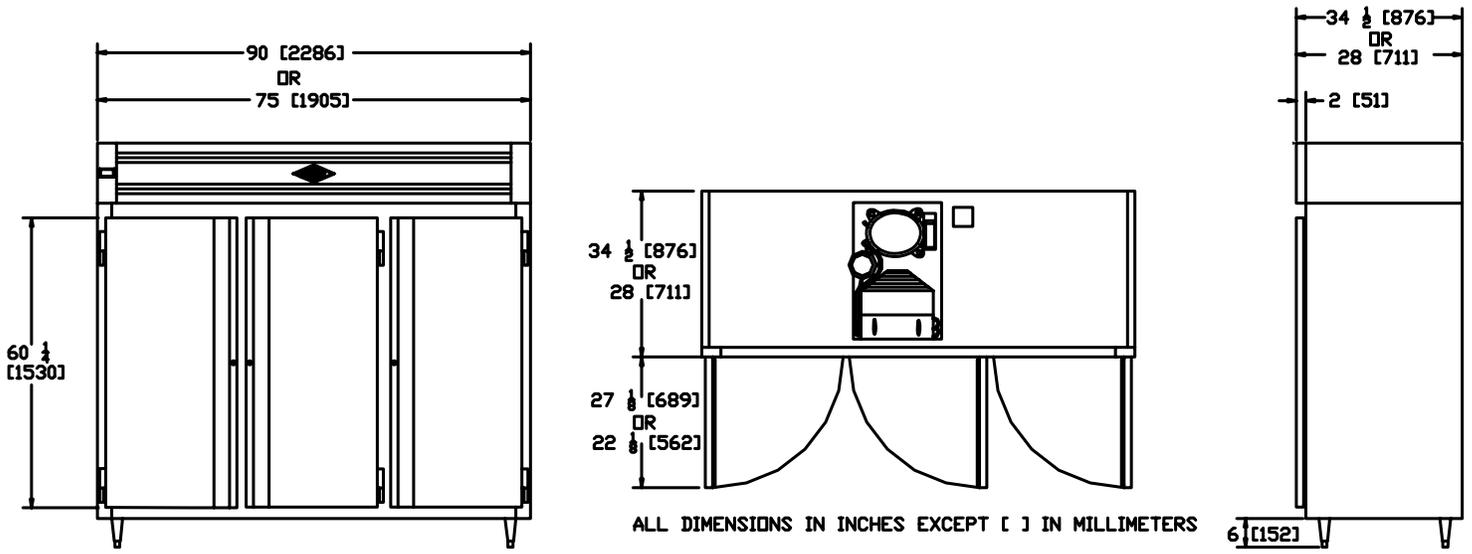

PRODUCT DATA (DATA IS FOR STD. MODELS; OPTIONS MAY CHANGE SPECIFICATIONS)	F-75 Std. Depth	F-75 Narrow Depth	F-90 Std. Depth	F-90 Narrow Depth
Width (overall)	75"	75"	90"	90"
Depth (overall)	34 1/2"	28"	34 1/2"	28"
Height (overall inc. legs)	86"	86"	86"	86"
Depth (door open 90°)	61 5/8"	50 1/8"	61 5/8"	50 1/8"
Door opening (net width)	18 1/4"	18 1/4"	23 1/4"	23 1/4"
Door opening (net height)	57 1/4"	57 1/4"	57 1/4"	57 1/4"
Half door opening (net ht.)	26 3/4"	26 3/4"	26 3/4"	26 3/4"
Capacity (cu.ft.)	69	54	84	65
Number of shelves	12	12	12	12
Shelf area (sq. ft., including bottom)	72	56	87	68
Voltage (dedicated circuit required)	115-208/230	115-208/230	115-208/230	115-208/230
Amperage (self-contained)	13.7	13.7	13.8	13.8
Amperage (remote)	11.0	11.0	11.1	11.1
NEMA plug configuration	No cord/plug	No cord/plug	No cord/plug	No cord/plug
Horsepower (self-contained)	1	1	1	1
Ship weight (lbs.)	887	850	967	945
Ship volume (cu. ft.)	152	127	181	151
Crated dimensions (87" H)	78 1/2" W x 38 1/2" D	78 1/2" W x 32" D	93 1/2" W x 38 1/2" D	93 1/2" W x 32" D

### SPECIFICATIONS

**Cabinet Exterior** - Exterior sides are constructed of heavy gauge stainless steel or aluminum. Exterior back and bottom are constructed of heavy gauge galvanized or optional stainless steel. Compressor housing and louver rails are stainless steel. Exterior digital thermometer. Cabinet is supported on heavy-duty, adjustable 6" legs. Cabinet body is 100% CFC free, foamed-in-place polyurethane insulation.

**Cabinet Interior** - All heavy gauge stainless steel or aluminum construction with radius corners. Automatic interior light with concealed actuator. Stainless steel shelf standards and shelf clips for superior durability and corrosion resistance. Four (4) chrome plated wire shelves per section. Door openings protected by impact-resistant PVC breaker strip.

**Doors** - All welded, stainless steel construction with magnetic snap-in gasket. Door perimeters have built-in energy saving condensate heaters. Integral full-length Unigrip™ recessed door handle with heavy-duty, built-in security lock. In order to prevent damage to door during installation, doors are equipped with self-closing lift-off cam hinges for easy door removal. Doors stay open at 120 degrees for easy access to interior. Insulation is 100% CFC free foamed-in-place polyurethane. Standard door hinging is left door hinged left, center and right doors hinged right (other configurations available; please specify).

**Refrigeration** - Top-mounted fully hermetic compressor with R-404a refrigerant. Thermostatic expansion valve for superior performance and efficiency, faster temperature recovery, less running time and less energy consumption. Electric condensate evaporator. Automatic defrost with fan delay to prevent hot air from being circulated in cabinet. Pressure control prevents compressor burnout in case of loss of refrigerant. Easy-to-use digital temp. control enables users to adjust setpoint between -5 to +5 degrees F.

In line with its policy to continually improve its products, Utility Refrigerator reserves the right to change materials and specifications without notice.



UTILITY® IS PROUDLY MADE IN THE USA F75S-GL



### UTILITY REFRIGERATOR

Manufacturers of The Finest Quality Refrigeration Equipment Since 1931  
 10029 Bradley Ave. Pacoima, CA 91331  
 (818) 899-8300 Fax (818) 899-8335  
 www.utilityrefrigerator.com